



# Power Macintosh G3 Series Desktop and Minitower Computers

## Features

### Next-generation PowerPC processor technology

- Introduces the first processor specifically optimized for the Mac OS—the PowerPC G3, running at 233, 266, or 300 MHz
- Uses a leading-edge, 0.25-micron process, for a smaller, lower-power chip design
- Features an innovative backside cache architecture to increase performance

### Innovative system architecture

- Debuts a new, more efficient logic board design
- Increases the system bus speed to maximize processor performance gains

### High-quality communications and multimedia support

- Makes communications fast and easy through built-in Ethernet networking
- Offers 16-bit stereo audio input/output, high-quality video input/output, and a digital audio/video connector\*
- Includes a 24x-speed (maximum) CD-ROM drive
- Is available with a Zip drive for easy file transfer and backup\*

### Outstanding flexibility

- Provides three standard 12-inch PCI slots for easy expansion of system functionality (open slots vary by configuration)
- Includes expansion bays for additional storage devices (varies by configuration)
- Speeds system expansion and servicing through an exceptionally easy-to-access design

### Mac OS 8.1 system software


- Enhances productivity through multitasking and rapid system response
- Supports extended volume format for increased hard disk capacity
- Provides innovative user-interface features that speed and simplify file and folder manipulation
- Makes Internet access and publishing as easy and enjoyable as using a Macintosh
- Scales easily to accommodate users from novice to expert

### Communications package\*

- Makes it easy to access (or restrict access to) the Internet, create web pages, manage your time and contacts, research information, and unwind from a hard day's work
- Includes an internal 56-Kbps data/14.4-Kbps fax modem\*\* plus Microsoft Internet Explorer, Netscape Navigator, America Online, SurfWatch, Adobe PageMill, FAXstf, Now Up-to-Date and Contact, Jack Nicklaus 4, Master of Orion II, and Microsoft Bookshelf 98

The Power Macintosh G3 series features exciting Apple innovations in processor technology and system architecture that significantly increase both performance and flexibility, to enhance your productivity and encourage your creativity. Like the processors that power them, these systems are designed to turn your ideal vision of powerful computing into an affordable reality.

### Power Macintosh Performance Comparisons

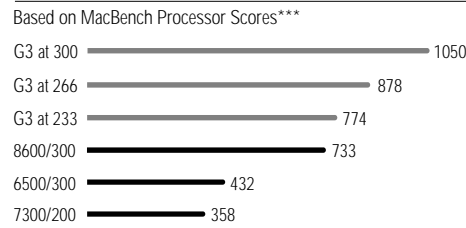

Built on the PowerPC G3—the next generation of PowerPC technology, and the first processor optimized for the Mac OS—these computers dramatically alter the price/performance equation. And by incorporating a new approach to cache memory, the Power Macintosh G3 models can provide nearly twice the performance of systems based on the PowerPC 603e processor—an improvement that far exceeds the increases in clock speed alone. In addition, these computers feature a new logic board design with a faster system bus, to maximize their power—and yours.

Power Macintosh G3 systems include the latest in communications and multimedia features: high-quality audio and video input/output, Ethernet networking, and a communications slot for adding a modem\*. So it's easy to work collaboratively with colleagues, whether they're just across the hall or clear across the country. Finally, to complement their hardware innovations, these advanced computers run Mac OS 8.1—the latest system software from Apple—which combines an appealing new look with even more exciting new capabilities.

Factor in these systems' three PCI expansion slots for further enhancing functionality, and you'll reach only one conclusion: The Power Macintosh G3 series offers an outstanding value—now and in the future.

\*Available in some configurations; see Available Configurations chart for product details.

\*\*Data speeds up to 56 Kbps, fax speeds up to 14.4 Kbps. Actual download speeds vary with line conditions and your Internet service provider's modem capabilities. FCC regulations limit ISP transmission speeds to 53 Kbps in the U.S. Note that only one serial port is available in systems with the internal modem installed.

\*\*\*Based on Apple internal testing using MacBench 4.0 processor performance scores. Actual performance on applications will vary. MacBench is a subsystem-level benchmark that measures the relative performance of Mac OS-based systems.





# Power Macintosh G3 Series

## Desktop and Minitower Computers

### Technical Specifications

#### Processor and memory

- 233-, 266-, or 300-MHz PowerPC G3 processor
- 512K or 1MB backside level 2 cache on processor module; 117-, 133-, or 150-MHz dedicated 64-bit backside bus
- 66-MHz system bus
- Integrated floating-point unit and 64K on-chip level 1 cache (32K for data and 32K for instruction)
- At least 32MB of SDRAM (3.3-volt, unbuffered, 64-bit wide, 168-pin, running at more than 100 MHz, 10-nanosecond cycle time); three DIMM slots support up to 192MB or 384MB
- 4MB of ROM
- 64-bit memory bus

#### Storage

- One or two internal IDE or Ultra/Wide SCSI hard disk drives
- Internal high-capacity floppy disk drive
  - Accepts high-density 1.44MB disks and 800K disks
  - Reads, writes, and formats Mac OS, Windows, MS-DOS, OS/2, and ProDOS disks
- Internal 24x-speed (maximum) ATAPI CD-ROM drive
- Optional internal ATAPI DVD-ROM drive supports CD-ROMs at 20x speed (maximum) or DVD-ROMs at 2x speed (maximum)
- Internal 100MB Zip drive\*
- Expansion bays for additional storage devices
  - Desktop models: One or two 3.5-in. drive bays (varies by configuration)
  - Minitower models: One 5.25-in. drive bay

#### Interfaces

- Three 12-inch PCI expansion slots compatible with PCI 2.1-compliant cards (open slots vary by configuration)
- Two high-speed DMA serial (RS-232/RS-422) ports compatible with LocalTalk cables
- Built-in 10BASE-T Ethernet connector; 10/100BASE-T Fast Ethernet PCI card\*
- Internal and external SCSI buses (up to 5 MBps)
- Apple Desktop Bus (ADB) expansion port
- DB-15 connector for monitor
- Communications slot for modem card\*
- Minijacks for 16-bit stereo audio input/output; up to 44.1-kHz sampling rate
- Composite and S-video connectors for video input/output\*

#### Graphics support

- Built-in 64-bit graphics and multimedia accelerator chip
- 2MB or 6MB of SGRAM video memory; supports up to 6MB
- 128-bit 2-D/3-D graphics PCI card with 8MB of EDO VRAM;\* provides support for dual monitors

Video Memory	Colors	
	Millions (32 bit)	Thousands (16 bit)
2MB SGRAM	Up to 832- by 624-pixel resolution	Up to 1,024- by 768-pixel resolution
Refresh rate	Up to 75 Hz	Up to 85 Hz
6MB SGRAM	Up to 1,024- by 768-pixel resolution	Up to 1,600- by 1,200-pixel resolution
Refresh rate	Up to 75 Hz	Up to 75 Hz
8MB EDO VRAM on PCI card	Up to 1,920- by 1,080-pixel resolution	Up to 1,920- by 1,200-pixel resolution
Refresh rate	Up to 72 Hz	Up to 76 Hz

#### Video capabilities\*

- 24-bit video input
  - Support for NTSC, PAL, and SECAM
  - Up to 320- by 240-pixel capture at up to 30 frames per second
  - Maximum capture size of 640 by 480 pixels
- 24-bit video output
  - High sample rate on output signal eliminates need for external and analog filtering
  - Support for NTSC and PAL
- Digital audio/video (DAV) connector

#### Electrical requirements and agency approvals

- Line voltage: 100 to 125 V AC or 200 to 240 V AC, RMS single phase, automatically configured
- Frequency: 50 to 60 Hz, single phase
- Power: 230W maximum for desktop, 240W maximum for minitower; not including display
- EPA Energy Star and Blue Angel compliant (desktop models only)

#### ADB power requirements

- Maximum current draw for all devices: 500 mA (maximum of three ADB devices recommended)
- Mouse draws 10 mA
- Keyboard draws 25 to 80 mA

#### Environmental requirements

- Operating temperature: 50° to 104° F (10° to 40° C)
- Storage temperature: -40° to 116° F (-40° to 47° C)
- Relative humidity: 5% to 95% noncondensing
- Maximum altitude: 10,000 ft. (3,048 m)

	Size and Weight	
	Desktop models	Minitower models
Height	6.2 in. (15.6 cm)	15.2 in. (38.6 cm)
Width	14.4 in. (36.5 cm)	9.6 in. (24.3 cm)
Depth	16.9 in. (43.0 cm)	17.8 in. (45.2 cm)
Weight**	22.7 lb. (10.2 kg)	33.1 lb. (15.0 kg)

\*Available in some configurations; see Available Configurations chart for product details.

\*\*May differ based on configuration.



# Power Macintosh G3 Series Desktop and Minitower Computers

## Ordering Information

All models also include an internal 1.44MB floppy disk drive; keyboard and mouse; Mac OS 8.1 (which includes Internet access software); complete setup, learning, and reference documentation; and limited warranty.

Product specifications are subject to change. For the most current information about product specifications and configurations, visit the Apple web site at [www.apple.com](http://www.apple.com) or check with your Apple reseller.

## Build-to-order (BTO) options

These systems can also be ordered through the online Apple Store, which allows you to custom-configure your computer in such areas as processor speed, RAM, hard disk drive, Zip drive, DVD-ROM drive, graphics support, audio/video capabilities, high-speed Ethernet, and modem. To learn more about BTO options or to order, visit our web site at [www.apple.com](http://www.apple.com).

## Available Configurations

Power Macintosh G3  
desktop computers



Order no.	M6141LL/A	M6202LL/A
Processor speed	233 MHz	266 MHz
Memory (SDRAM)	32MB; supports up to 192MB	32MB; supports up to 192MB
Backside level 2 cache	512K	512K
Backside bus speed	117 MHz	133 MHz
System bus speed	66 MHz	66 MHz
Hard disk drive	4GB IDE drive	4GB IDE drive
CD-ROM drive	24x-speed (maximum)	24x-speed (maximum)
Zip drive	—	Yes
Graphics support	2MB SGRAM	2MB SGRAM
Audio/Video capabilities	Audio input/output	Audio input/output
Ethernet	10BASE-T	10BASE-T
Communications package (modem and software)	—	—

Power Macintosh G3  
minitower computers



Order no.	M6431LL/A	M6142LL/A	M6459LL/A
Processor speed	233 MHz	266 MHz	266 MHz
Memory (SDRAM)	32MB; supports up to 384MB	32MB; supports up to 384MB	128MB; supports up to 384MB
Backside level 2 cache	512K	512K	512K
Backside bus speed	117 MHz	133 MHz	133 MHz
System bus speed	66 MHz	66 MHz	66 MHz
Hard disk drive	4GB IDE drive	6GB IDE drive	4GB Ultra/Wide SCSI drive and PCI card
CD-ROM drive	24x-speed (maximum)	24x-speed (maximum)	24x-speed (maximum)
Zip drive	—	Yes	—
Graphics support	2MB SGRAM	2MB SGRAM	6MB SGRAM; 8MB EDO VRAM on 2-D/3-D graphics PCI card
Audio/Video capabilities	Audio input/output	Audio/Video input/output	Audio input/output
Ethernet	10BASE-T	10BASE-T	10BASE-T; 10/100BASE-T PCI card
Communications package (modem and software)	Yes	—	—

Order no.	M6572LL/A	M6494LL/A
Processor speed	300 MHz	300 MHz
Memory (SDRAM)	64MB (one 64MB DIMM); supports up to 384MB	128MB (one 128MB DIMM); supports up to 384MB
Backside level 2 cache	1MB	1MB
Backside bus speed	150 MHz	150 MHz
System bus speed	66 MHz	66 MHz
Hard disk drive	One 4GB Ultra/Wide SCSI drive and PCI card	Two 4GB Ultra/Wide SCSI drives and PCI card
CD-ROM drive	24x-speed (maximum)	24x-speed (maximum)
Zip drive	—	—
Graphics support	6MB SGRAM	6MB SGRAM; 8MB EDO VRAM on 2-D/3-D graphics PCI card
Audio/Video capabilities	Audio input/output	Audio input/output
Ethernet	10BASE-T	10BASE-T; 10/100BASE-T PCI card
Communications package (modem and software)	—	—

Apple Computer, Inc.  
1 Infinite Loop  
Cupertino, CA 95014  
(408) 996-1010  
[www.apple.com](http://www.apple.com)

© 1998 Apple Computer, Inc. All rights reserved. Apple, the Apple logo, LocalTalk, Mac, Macintosh, Power Macintosh, and ProDOS are trademarks of Apple Computer, Inc., registered in the U.S.A. and other countries. The Apple Store is a trademark of Apple Computer, Inc. PowerPC is a trademark of International Business Machines Corporation, used under license therefrom. Other product and company names mentioned herein may be trademarks of their respective companies. Mention of non-Apple products is for informational purposes only and constitutes neither an endorsement nor a recommendation. Apple assumes no responsibility with regard to the selection, performance, or use of these products. All understandings, agreements, or warranties, if any, take place between the vendors and the prospective users.  
March 1998.  
L02515E